


DR SERIES

HIGH INTENSITY GAS-FIRED INFRARED SPACE HEATERS



Optimal Fuel and Comfort Benefits with Unsurpassed Features

The DR Series represents today's most popular line of gas-fired, infrared heaters. This unvented heater is ideal for use in many applications including areas of high air filtration, high ceilings and spot heating. The DR Series offers exclusive design features, a proven history and a variety of BTU and control options.

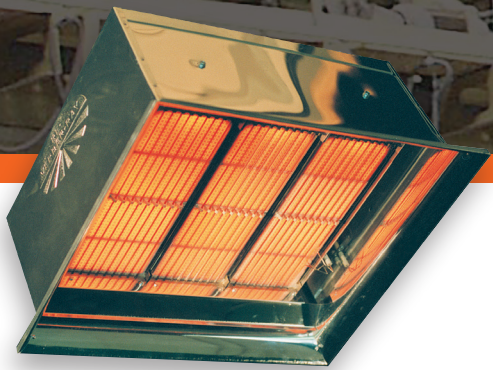

PRODUCT FEATURES

- Exclusive ceramic burner provides maximum infrared radiation.
- Stainless steel rods increase heat temperature and efficiency.
- Highly polished aluminum reflector design.
- Direct spark or pilot ignition.
- Potted circuitry for protection in high moisture environments (DSI only).
- 5-year limited ceramic burner warranty.
- CSA Design Certified.

BENEFITS OF HEATING WITH INFRARED

- Compact Comfort
- Indoor Air Quality
- Reduced Energy Consumption
- Flexibility
- Durability
- Radiant Efficiency

DR SERIES

HIGH INTENSITY GAS-FIRED INFRARED SPACE HEATERS

PRODUCT SPECIFICATIONS



Input Range:
30,000 to 160,000 BTU/h



Certification:
CSA (Indoor)



Gas Type:
Natural (3.5" W.C.) or Propane (10.0" W.C.)




Limited Warranty:
5 (Burners) - 1 (Controls)



AVAILABLE DR MODELS & CLEARANCES

MODEL #	GAS ¹	BTU/h INPUT	WEIGHT	MOUNTING HEIGHTS ²	CLEARANCES TO COMBUSTIBLES ³ (INCHES)	SIDE(S)	BACK	TOP	BELOW/ FRONT
DR-30(S)	Nat or Prop	30,000	18 lbs	12' to 14'		30"	18"	28"	72"
DR-30	Nat or Prop	30,000	18 lbs	12' to 14'		30"	18"	28"	72"
DR-45	Nat or Prop	45,000	27 lbs	12' to 14'		30"	18"	28"	72"
DR-50	Nat or Prop	50,000	27 lbs	12' to 14'		30"	18"	34"	72"
DR-60	Nat or Prop	60,000	27 lbs	14' to 16'		32"	18"	40"	72"*
DR-75	Nat or Prop	75,000	36 lbs	15' to 17'		48"	30"	42"	98"
DR-80	Nat or Prop	80,000	36 lbs	15' to 17'		48"	30"	42"	98"
DR-90	Nat or Prop	90,000	36 lbs	16' to 18'		48"	30"	42"	98"
DR-100	Nat or Prop	100,000	36 lbs	17' to 20'		48"	30"	52"	120"
DR-130	Nat or Prop	130,000	45 lbs	21' to 24'		48"	30"	52"	120"
DR-160	Nat or Prop	160,000	54 lbs	24' to 28'	50"	32"	60"	132"	

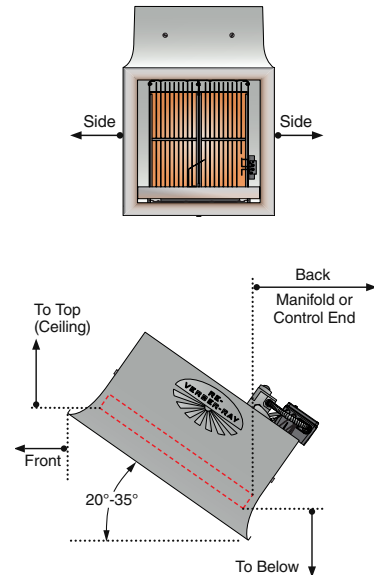

¹ Specify natural (Nat) or propane (Prop) gas.

² Factory recommended mounting heights are provided

³ Clearance is 80 in. when heater is fitted with a parabolic reflector.

⁴ Mounting heights are recommended and provided as a guideline only. Actual conditions may dictate variations from the above data.

⁵ Always maintain the published clearances to combustibles and place signs where necessary in accordance with ANSI Standards.

Always maintain the published clearances to combustibles.



34 Scott Ave., Paris, Ontario N3L3R1 Canada
+1.519.442.7823 | sales@brantradiant.com

www.BRANTRADIANT.com



Form No. LBLD2-0218

