

BAH SERIES

MEDIUM-WAVE ELECTRIC INFRARED SPACE HEATERS


RE-VERBER-RAY

by Brant Radiant Heaters Limited

INFRARED RADIANT HEATERS

The BAH provides an option for low clearance to combustible areas that require an electric heating solution.

Electric infrared heaters are the cleanest method of heating, taking nothing from the air and adding nothing to the air. They produce heat by running an electric current through a high-resistance element. BAH series heaters are ideal for low output, low clearance to combustible areas, and in applications where gas and/or ventilation is not available or impractical.

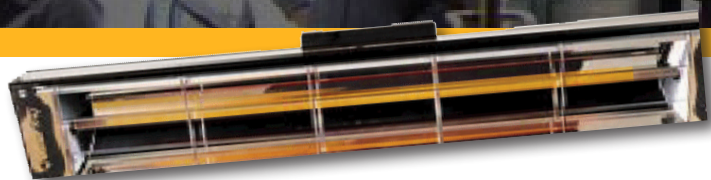

BENEFITS OF HEATING WITH INFRARED

- Superior Comfort
- Indoor Air Quality
- Reduced Energy Consumption
- Flexibility
- Durability
- Even Heat Distribution

PRODUCT FEATURES

- Voltage inputs of 120, 208, 240, and 575
- Six models available ranging from 0.5 kW to 4.0 kW
- Pollution free - no venting required
- 1 year limited warranty
- ETL Certified

BAH SERIES

MEDIUM-WAVE ELECTRIC INFRARED SPACE HEATER

PRODUCT SPECIFICATIONS



Input Range:
120, 208, 240, 480 and 575 Volts



Limited Warranty:
All Components - 1 year



Lengths:
18-in to 60-in




Electrical:
.5 kW to 4.0 kW



Lamp Elements:
.5 I.D. drawn Quartz with high temperature ceramic end caps



Certification:
ETL

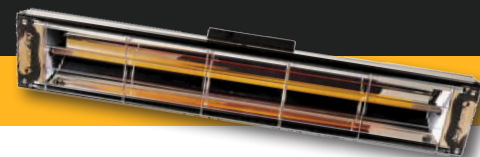



AVAILABLE BAH MODELS & CLEARANCES

MODEL #	VOLTS	kW	WATTS	AMP	BTU/h	LENGTH	WIDTH	HEIGHT	SHIP WEIGHT	CLEARANCE TO COMBUSTIBLES ³ (INCHES)		
										SIDE	TOP	BELOW
BAH-18-A-05*	120	0.5	500	4.2	1,700	18"	6.75"	6.4"	8 lbs.	18"	12"	24"
BAH-25-A-10*	120	1.0	1,000	8.3	3,400	25"	6.75"	6.4"	10 lbs.	18"	12"	24"
BAH-25-B-10*	208	1.0	1,000	4.8	3,400	25"	6.75"	6.4"	10 lbs.	18"	12"	24"
BAH-25-C-10*	240	1.0	1,000	4.2	3,400	25"	6.75"	6.4"	10 lbs.	18"	12"	24"
BAH-35-A-17*	120	1.7	1,750	14.0	5,900	35"	6.75"	6.4"	13 lbs.	18"	12"	24"
BAH-35-B-17*	208	1.7	1,750	8.3	5,900	35"	6.75"	6.4"	13 lbs.	18"	12"	24"
BAH-35-C-17*	240	1.7	1,750	7.0	5,900	35"	6.75"	6.4"	13 lbs.	18"	12"	24"
BAH-35-G-17	480	1.7	1,750	3.6	5,900	35"	6.75"	6.4"	13 lbs.	18"	12"	24"
BAH-45-B-25	208	2.5	2,500	12.0	8,500	45"	6.75"	6.4"	16 lbs.	18"	12"	24"
BAH-45-C-25	240	2.5	2,500	10.0	8,500	45"	6.75"	6.4"	16 lbs.	18"	12"	24"
BAH-45-G-25	480	2.5	2,500	5.2	8,500	45"	6.75"	6.4"	16 lbs.	18"	12"	24"
BAH-60-B-30†	208	3.0	3,000	14.0	10,200	60"	6.75"	6.4"	20 lbs.	18"	12"	24"
BAH-60-C-30†	240	3.0	3,000	12.0	10,200	60"	6.75"	6.4"	20 lbs.	18"	12"	24"
BAH-60-G-30†	480	3.0	3,000	6.3	10,200	60"	6.75"	6.4"	20 lbs.	18"	12"	24"
BAH-60-C-40†	240	4.0	4,000	16.5	13,500	60"	6.75"	6.4"	20 lbs.	18"	12"	24"
BAH-60-D-40†	575	4.0	4,000	7.0	13,500	60"	6.75"	6.4"	20 lbs.	18"	12"	24"
BAH-60-G-40†	480	4.0	4,000	8.3	13,500	60"	6.75"	6.4"	20 lbs.	18"	12"	24"


* Stocked Unit. † Truckline Only

Clearances to combustibles must be maintained. Clearances are measured from the radiant surface and/or heater bottom to the nearest combustible surface. It is essential that the position and the angle of the installation avoids any possibility of curtains, draperies or other flammable material coming in contact with the heater.


CLEARANCE TO COMBUSTIBLES

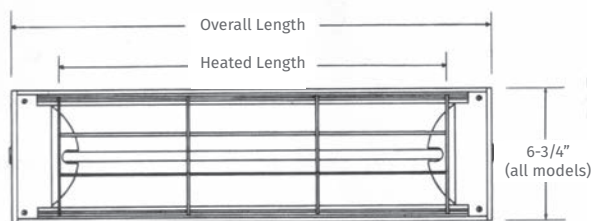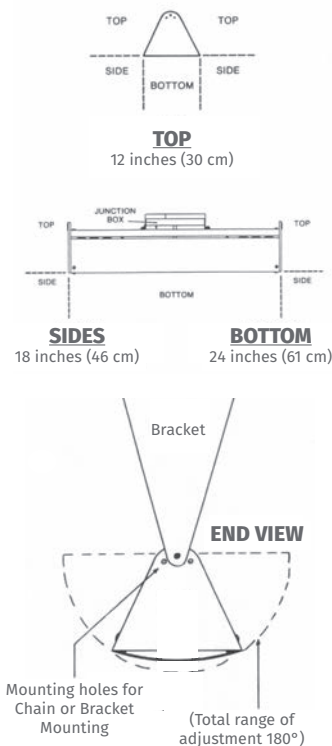

BOTTOM VIEW

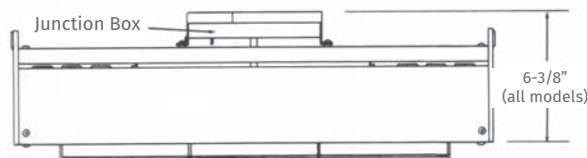

SIDE VIEW



34 Scott Ave., Paris, Ontario N3L3R1 Canada
+1.519.442.7823 | sales@brantradiant.com

www.BRANTRADIANT.com



Form No. LBBAH-0519

