

FA SERIES

GAS-FIRED, SEPARATED COMBUSTION UNIT HEATER

RE-VERBER-RAY®

INFRARED RADIANT HEATERS

Optimal Fuel and Comfort Benefits with Unsurpassed Features

The FA Series line of gas-fired, tubular exchanger, induced draft hot air heaters are available for use in commercial, industrial & agricultural applications. This line of heaters features a low profile design with a durable, powder-coated black enamel exterior and stainless steel louvers for an exceptional aesthetic appeal. The FA Series can be used as separated combustion or power-vented out-of-the-box.



BENEFITS OF HEATING WITH FORCED AIR

- Compact Comfort
- Constant Air Circulation
- Reduced Energy Consumption
- Even Temperatures
- Durability
- Efficient Heating

PRODUCT FEATURES

- Compact, aesthetically pleasing construction.
- Easy to install with minimal assembly required.
- Swept wing air propeller, for noise reduction.
- Operational indicator lights are standard.
- Finger proof fan guards are standard.
- Models up to 125,000 BTU/h can be rotated 180°.
- Traditional profile design with durable, powder-coated black enamel.
- North American ETL certified for indoor use.

FA SERIES

GAS-FIRED, SEPARATED COMBUSTION UNIT HEATER

PRODUCT SPECIFICATIONS



Input Range:
100,000 to 250,000 BTU/h



Certification:
ETL Listed North America



Gas Type:
Natural (3.5" W.C.) or Propane (10.0" W.C.)



Limited Warranty:
1 (Components) - 5 (Exchangers) - 10 (Burners)



Heat Exchangers:
Tubular Aluminized Steel




Electrical:
120V, 60 Hz. VAC (primary)
24 VAC (thermostatic).



AVAILABLE FA MODELS & CLEARANCES

MODEL #	GAS ¹	BTU/h INPUT	WEIGHT	MOUNTING HEIGHTS ²	APPROX. HEAT THROW	HEATER WIDTH DIM "A"	HEATER WIDTH DIM "B"	MOUNTS WIDTH DIM "C"	MOUNTS AXIS DIM "D"
FA-100	Nat or Prop	100,000	143 lbs	12' to 14'	43'	21"	9.375"	9.5"	19.125"
FA-125	Nat or Prop	125,000	143 lbs	14' to 16'	57'	21"	9.375"	9.5"	19.125"
FA-150	Nat or Prop	150,000	195 lbs	14' to 16'	52'	27"	12.5"	9.5"	19.125"
FA-175	Nat or Prop	175,000	195 lbs	15' to 17'	51'	27"	12.5"	9.5"	19.125"
FA-200	Nat or Prop	200,000	195 lbs	15' to 17'	55'	27"	12.5"	9.5"	19.125"
FA-225	Nat or Prop	225,000	212 lbs	16' to 18'	59'	30"	13.875"	9.5"	19.125"
FA-250	Nat or Prop	250,000	212 lbs	16' to 1'	63'	30"	13.875"	9.5"	19.125"

Always maintain the published clearances to combustibles.

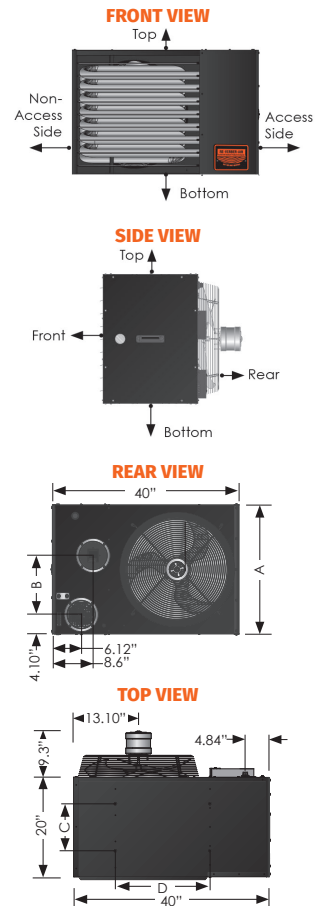

BRANT RADIANT
HEATERS LIMITED

34 Scott Ave., Paris, Ontario N3L3R1 Canada
+1.519.442.7823 | sales@brantradiant.com

www.BRANTRADIANT.com



Form No. LBLD2-0118

